

Combination Reversing Starters - Fusible Disconnect Switch Type with fuse holders for Class J fuses - FVR


UL/CSA max. Hp rating 50/60Hz 3 phase				Discon- Fuse nect Clip Switch Size ¹⁾ Size		Standard auxiliary contacts		Type		Price includes 3 phase, bimetallic overload relay Enclosed	
								Specify coil voltage and frequency → pages 03/065, 066		General purpose Type 1 Replace <input type="checkbox"/> with suffix /S	
								Specify overload relay suffix code → page 03/023		Industrial use Type 12 dusttight Replace <input type="checkbox"/> with suffix / SD Type 3R weatherproof Replace <input type="checkbox"/> with suffix / DW	
200 V	230 V	460 V	575 V	A	A	N.O.	N.C.	... (..)		see price list	see price list
3	3	5	7 1/2	30	30	0	1	MW00M-01/P2-30FC23/Z00-... <input type="checkbox"/> (...)			
-	-	7 1/2	10	30	30	0	1	MW00AM-01/P2-30FC23/Z00-... <input type="checkbox"/> (...)			
5	5	10	15	30	30	1	1	MW0M/11/P2-30FC23/Z00-... <input type="checkbox"/> (...)			
-	7 1/2	-	-	30	60	1	1	MW0M/11/P2-30FC23/Z00-... <input type="checkbox"/> (...)			
7 1/2	-	-	-	30	60	1	1	MW0M/11/P2-30FC26/Z1-... <input type="checkbox"/> (...)			
-	-	15	20	30	60	1	1	MW0AM/11/P2-30FC26/Z00-... <input type="checkbox"/> (...)			
-	10	-	-	30	60	1	1	MW0AM/11/P2-30FC26/Z1-... <input type="checkbox"/> (...)			
-	-	20	25	30	60	1	1	MW1M/11/P2-30FC26/Z1-... <input type="checkbox"/> (...)			
10	-	-	-	60	60	1	1	MW1M/11/P2-60FC26/Z1-... <input type="checkbox"/> (...)			
-	-	25	30	60	60	1	1	MW1AM/11/P2-60FC26/Z1-... <input type="checkbox"/> (...)			
-	15	-	-	60	100	1	1	MW1AM/11/P2-60FC110/Z1-... <input type="checkbox"/> (...)			
-	-	30	-	60	60	1	1	MW2M/11/P2-60FC26/Z1-... <input type="checkbox"/> (...)			
15	20	40	40	60	100	1	1	MW2M11/P2-60FC110/Z1-... <input type="checkbox"/> (...)			
-	-	-	50	60	100	1	1	MW2AM/11/P2-60FC110/Z1-... <input type="checkbox"/> (...)			
20	25	50	-	100	100	1	1	MW2AM/11/P2-100FC110/Z1-... <input type="checkbox"/> (...)			
-	-	-	60	100	100	1	1	MW3M80/11/P2-100FC110/Z1-... <input type="checkbox"/> (...)			
25	30	60	75	100	200	1	1	MW3M80/11/P2-100+62003J/Z5-100 <input type="checkbox"/> (...)			
30	-	75	100	100	200	1	1	MW4M115/11/P2-100+62003J/Z5-100 <input type="checkbox"/> (...)			

Notes:

- 1) Recommended Class J time-delay fuse ampacity
Range: 1.25 - 1.5 x motor full load current
- 2) Contact Moeller Electric for larger sizes

To order specify:

- Type number _____
- Overload relay suffix _____
- Enclosure suffix _____
- Coil voltage _____
- Accessories _____

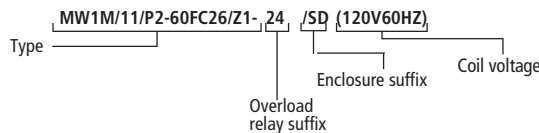

Additional information

Additional information	Page
Technical data	03/080
Dimensions	03/092
Overload relays	04/004
Accessories	03/053
Factory modifications	03/046
Weights	14/020

Combination Reversing Starters - Fusible Disconnect Switch Type with fuse holders for Class R fuses - FVR


UL/CSA max. Hp rating 50/60Hz 3 phase				Discon- nect Switch	Fuse Clip Size ¹⁾	Standard auxiliary contacts		Type	Price includes 3 phase, bimetallic overload relay		
200 V	230 V	460 V	575 V	A	A	N.O.	N.C.	Specify coil voltage and frequency → pages 03/065, 066	Enclosed		
HP	HP	HP	HP					Specify overload relay suffix code → page 03/023	General purpose Type 1 Replace <input type="checkbox"/> with suf- fix /S	Industrial use Type 12 dusttight Replace <input type="checkbox"/> with suffix / SD Type 3R weatherproof Replace <input type="checkbox"/> with suffix / DW	
								...	(...)	see price list	see price list
3	3	-	-	30	30	0	1	MW00M-01/P2-30FC33/Z00-... <input type="checkbox"/> (...)			
-	-	5	7 1/2	30	30	0	1	MW00M-01/P2-30FC36/Z00-... <input type="checkbox"/> (...)			
-	-	7 1/2	10	30	30	0	1	MW00AM-01/P2-30FC36/Z00-... <input type="checkbox"/> (...)			
5	5	-	-	30	30	1	1	MW0M/11/P2-30FC33/Z00-... <input type="checkbox"/> (...)			
-	7 1/2	-	-	30	60	1	1	MW0M/11/P2-30FC43/Z00-... <input type="checkbox"/> (...)			
7 1/2	-	-	-	30	60	1	1	MW0M/11/P2-30FC36/Z1-... <input type="checkbox"/> (...)			
-	-	10	15	30	30	1	1	MW0M/11/P2-30FC36/Z00-... <input type="checkbox"/> (...)			
-	10	-	-	30	60	1	1	MW0AM/11/P2-30FC43/Z1-... <input type="checkbox"/> (...)			
-	-	15	20	30	60	1	1	MW0AM/11/P2-30FC46/Z00-... <input type="checkbox"/> (...)			
10	-	-	-	60	60	1	1	MW1M/11/P2-60FC43/Z1-... <input type="checkbox"/> (...)			
-	-	20	25	30	60	1	1	MW1M/11/P2-30FC46/Z1-... <input type="checkbox"/> (...)			
-	15	-	-	60	100	1	1	MW1AM/11/P2-60FC310/Z1-... <input type="checkbox"/> (...)			
-	-	25	30	60	60	1	1	MW1AM/11/P2-60FC46/Z1-... <input type="checkbox"/> (...)			
15	20	40	40	60	100	1	1	MW2M/11/P2-60FC310/Z1-... <input type="checkbox"/> (...)			
-	-	30	-	60	60	1	1	MW2M/11/P2-60FC46/Z1-... <input type="checkbox"/> (...)			
20	-	50	-	100	100	1	1	MW2AM/11/P2-100FC310/Z1-... <input type="checkbox"/> (...)			
-	25	-	-	100	200	1	1	MW2AM/11/P2-100+22003R/Z1-... <input type="checkbox"/> (...)			
-	-	-	50	60	100	1	1	MW2AM/11/P2-60FC310/Z1-... <input type="checkbox"/> (...)			
-	-	-	60	100	100	1	1	MW3M80/11/P2-100FC310/Z1-... <input type="checkbox"/> (...)			
25	30	-	-	100	200	1	1	MW3M80/11/P2-100-22003R/Z5-100 <input type="checkbox"/> (...)			
-	-	60	75	100	200	1	1	MW3M80/11/P2-100+62003R/Z5-100 <input type="checkbox"/> (...)			
30	-	-	-	100	200	1	1	MW4M115/11/P2-100+22003R/Z5-100 <input type="checkbox"/> (...)			
-	-	75	100	100	200	1	1	MW4M115/11/P2-100+62003R/Z5-100 <input type="checkbox"/> (...)			

Notes:

- 1) Recommended Class R rejection-time-delay fuse ampacity
Range: 1.25 - 1.5 x motor full load current
- 2) Contact Moeller Electric for larger sizes

To order specify:

- Type number
- Overload relay suffix
- Enclosure suffix
- Coil voltage
- Accessories

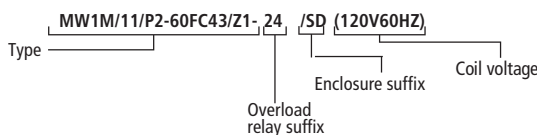

Additional information	Page
Technical data	03/080
Dimensions	03/092
Overload relays	04/004
Accessories	03/053
Factory modifications	03/046
Weights	14/020